

PRF-2

Bent Axis Hydraulic Piston Pumps (High Pressure)


Bent Axis Hydraulic Piston Pumps, Single Flow, Single Output.
High Pressure, High Rotational Speed, High Efficiency, Slim Design.
Cast Iron Pump Body, Re-Designed in .

Designation;


12cc, 18cc, 25cc, 32cc, 40cc,
50cc, 63cc, 80cc, 108cc, 130cc




PRF-2 12 cc

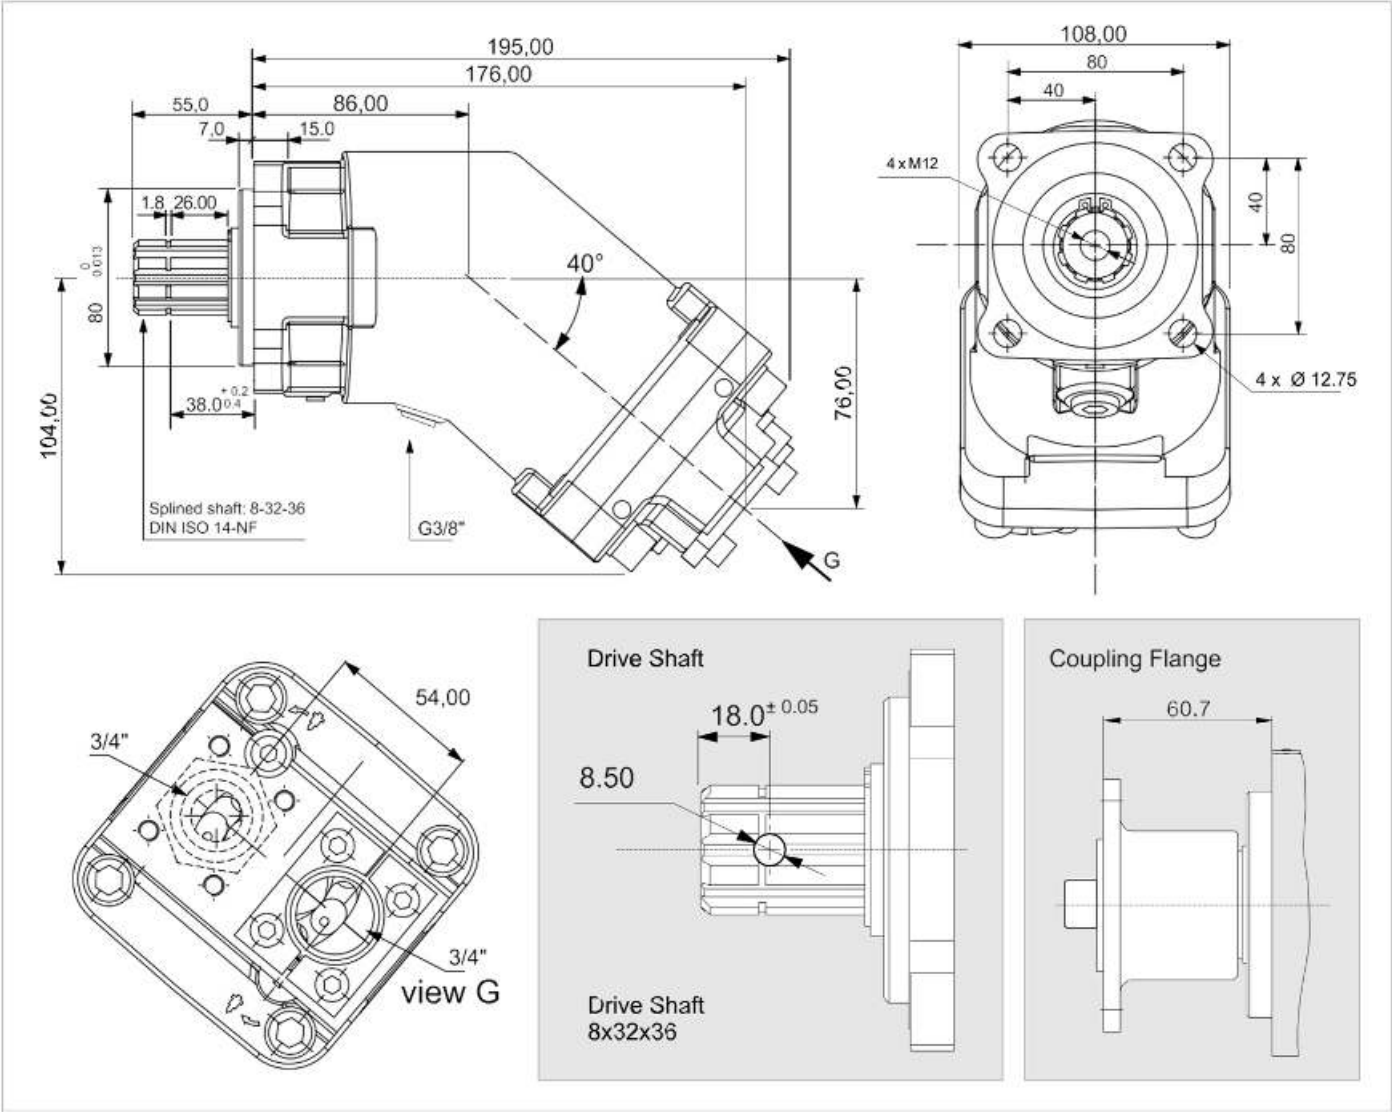


x 1000 rpm	12,00 cc
x 1500 rpm	18,00 cc
Max. Continuous Pump Speed	2300 rpm
Max. Limited Pump Speed	3100 rpm
Max. Continuous Pressure	350 bar
Max. Intermit. Peak Pressure	400 bar
Max. Torque at 350 bar	71 Nm
Weight without inlet fitting	9,00 kg
Weight with inlet fitting	9,40 kg
Torque without inlet fitting	8,70 N.m
Torque with inlet fitting	9,15 N.m
Rotation	CW-CCW
Fluid	Min. B. Hyd. Oil
Inlet & Outlet	3/4"

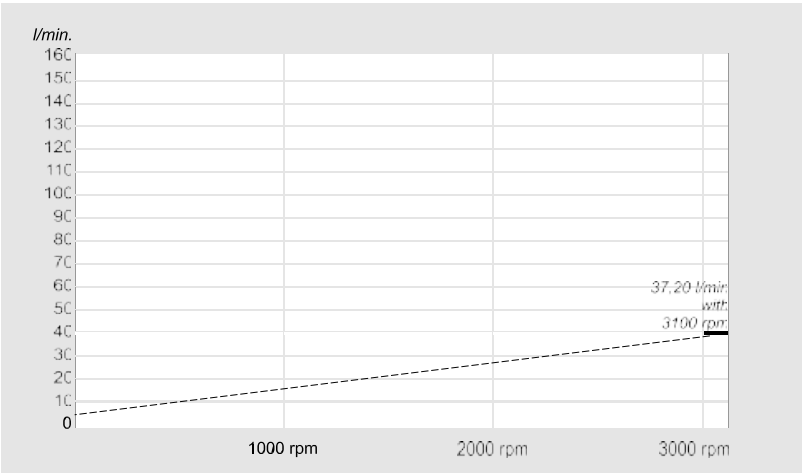


PRF-2 18 cc

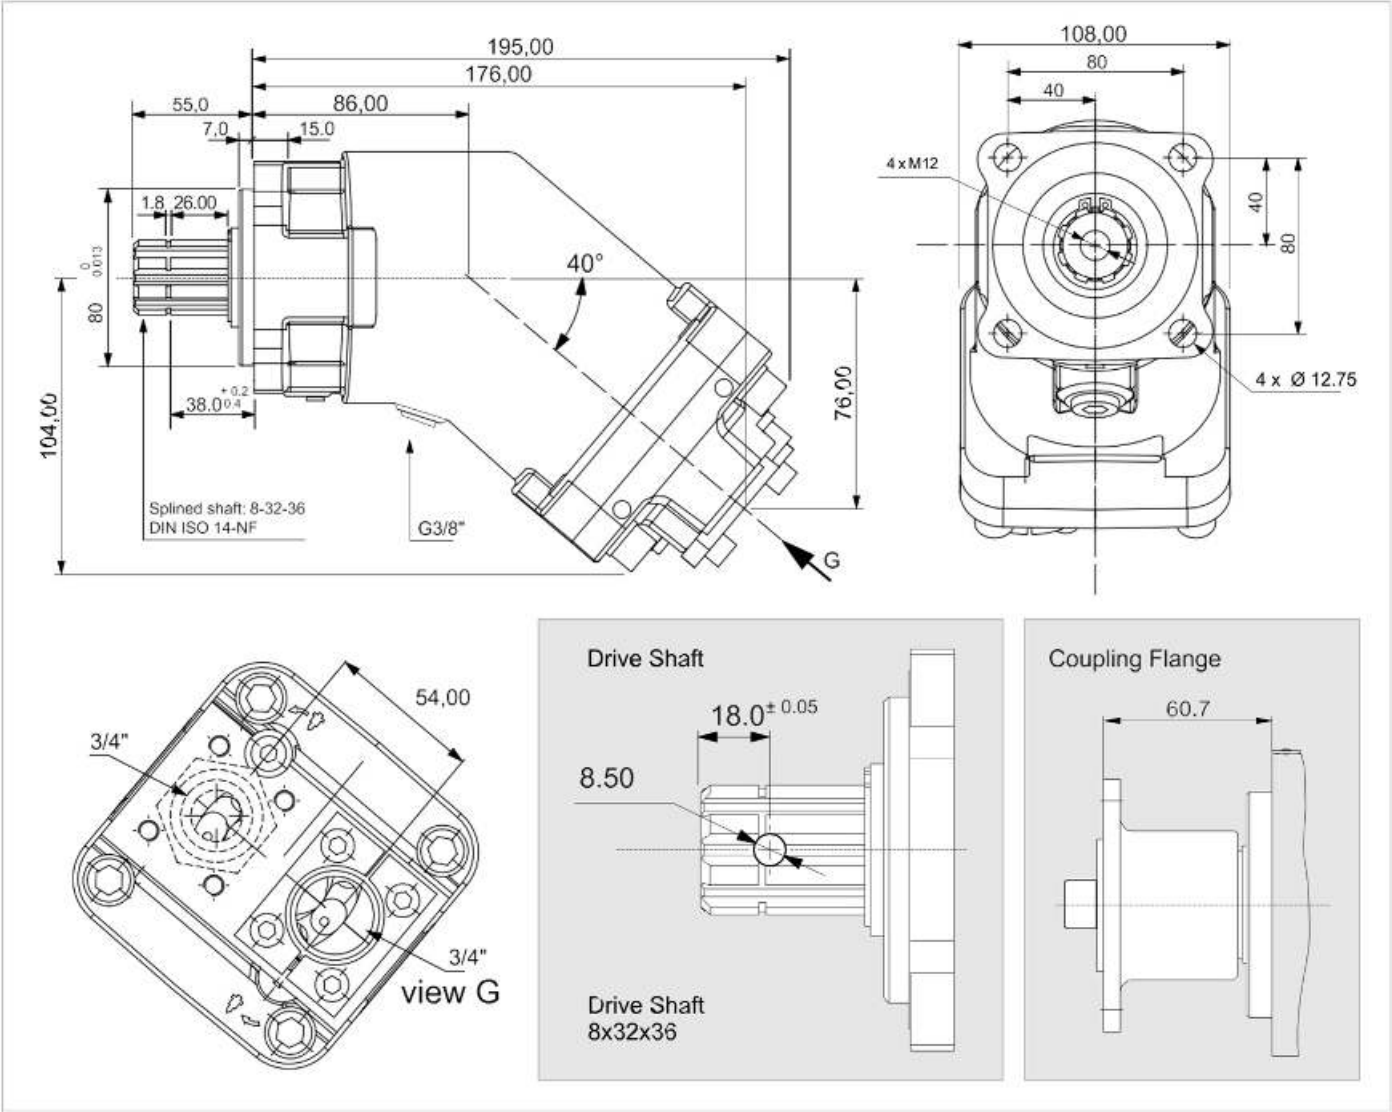


x 1000 rpm	18,00 cc
x 1500 rpm	27,00 cc
Max. Continuous Pump Speed	2300 rpm
Max. Limited Pump Speed	2900 rpm
Max. Continuous Pressure	350 bar
Max. Intermit. Peak Pressure	400 bar
Max. Torque at 350 bar	105 Nm
Weight without inlet fitting	9,00 kg
Weight with inlet fitting	9,40 kg
Torque without inlet fitting	8,75 N.m
Torque with inlet fitting	9,19 N.m
Rotation	CW-CCW
Fluid	Min.B. Hyd.Oil
Inlet & Outlet	3/4"

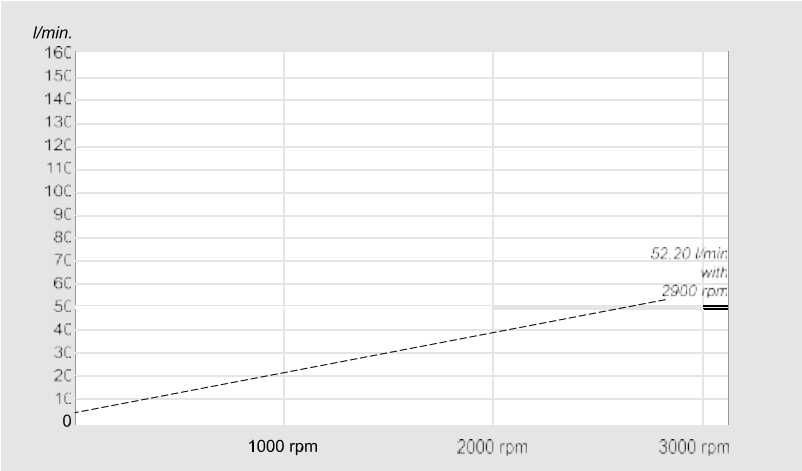


PRF-2 25 cc

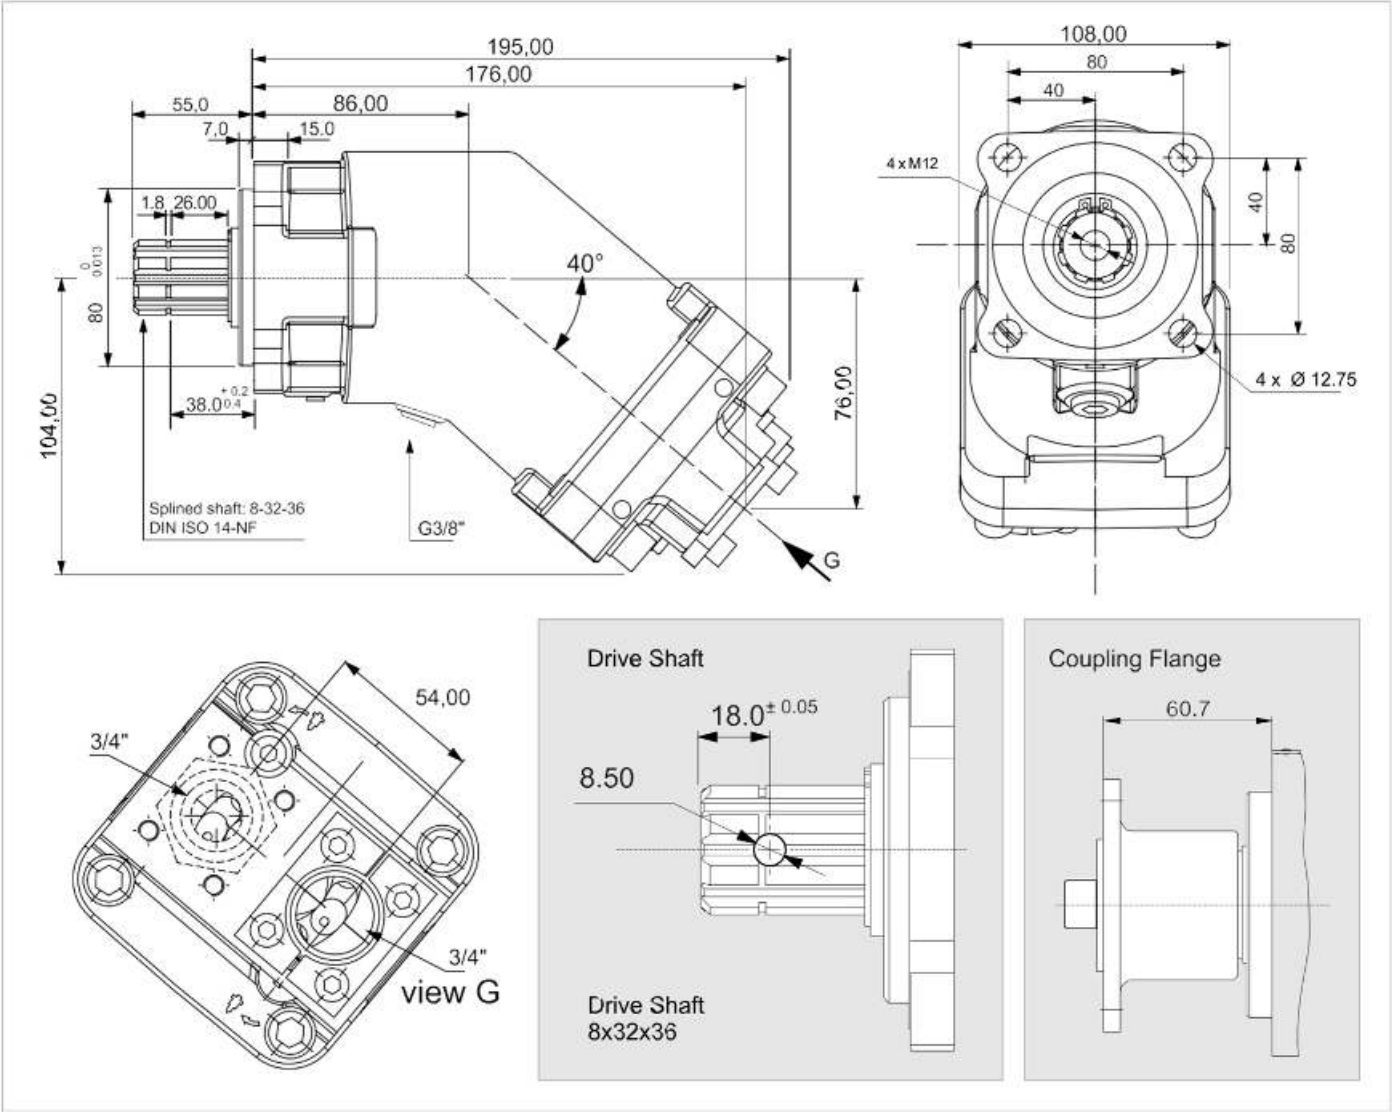


x 1000 rpm	25,00 cc
x 1500 rpm	37,50 cc
Max. Continuous Pump Speed	2300 rpm
Max. Limited Pump Speed	2700 rpm
Max. Continuous Pressure	350 bar
Max. Intermit. Peak Pressure	400 bar
Max. Torque at 350 bar	146 Nm
Weight without inlet fitting	9,50 kg
Weight with inlet fitting	9,90 kg
Torque without inlet fitting	8,82 N.m
Torque with inlet fitting	9,23 N.m
Rotation	CW-CCW
Fluid	Min. B. Hyd. Oil
Inlet & Outlet	3/4"

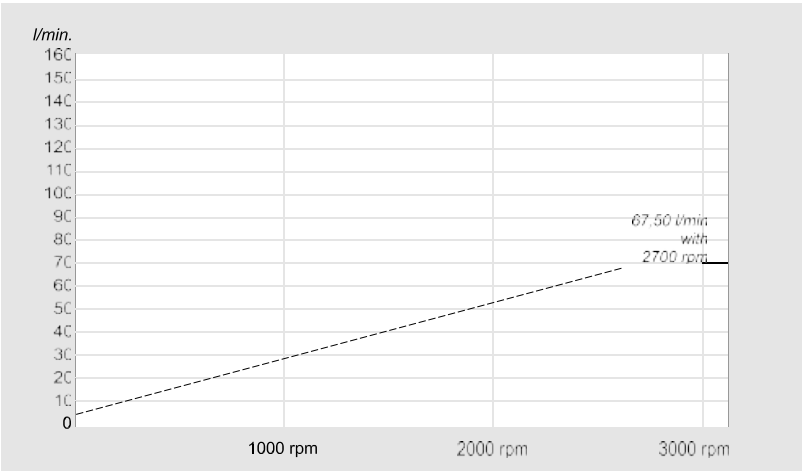


PRF-2 32 cc

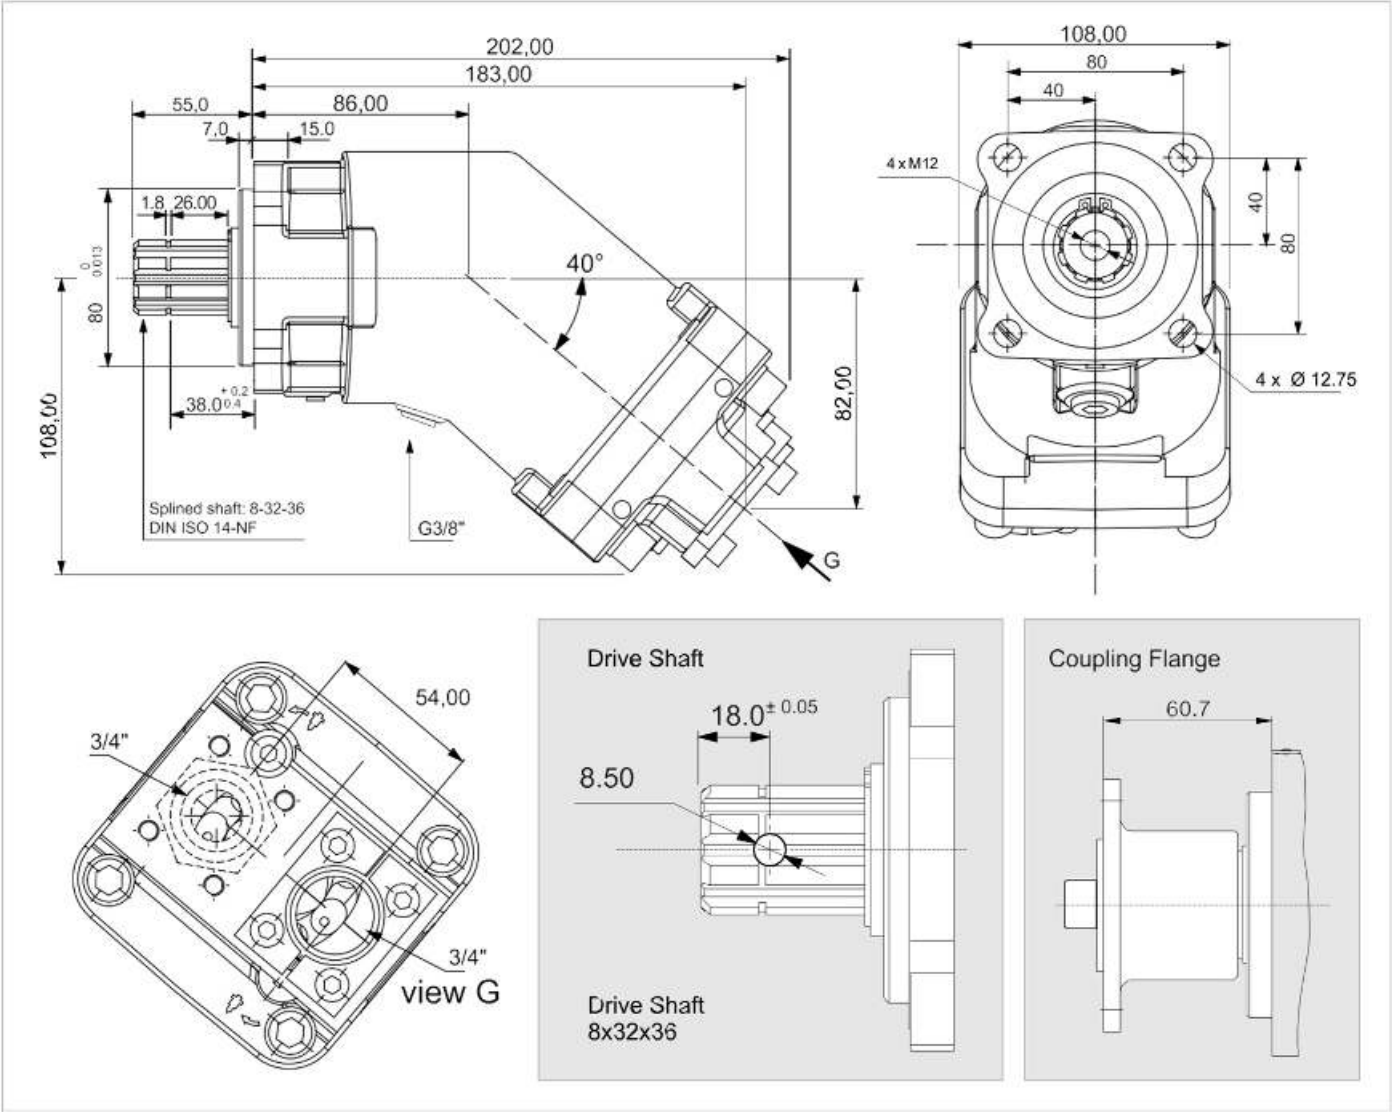


x 1000 rpm	32,00 cc
x 1500 rpm	48,00 cc
Max. Continuous Pump Speed	2250 rpm
Max. Limited Pump Speed	2700 rpm
Max. Continuous Pressure	350 bar
Max. Intermit. Peak Pressure	400 bar
Max. Torque at 350 bar	190 Nm
Weight without inlet fitting	10,50 kg
Weight with inlet fitting	10,90 kg
Torque without inlet fitting	11,00 N.m
Torque with inlet fitting	11,52 N.m
Rotation	CW-CCW
Fluid	Min. B.Hyd.Oil
Inlet & Outlet	3/4"

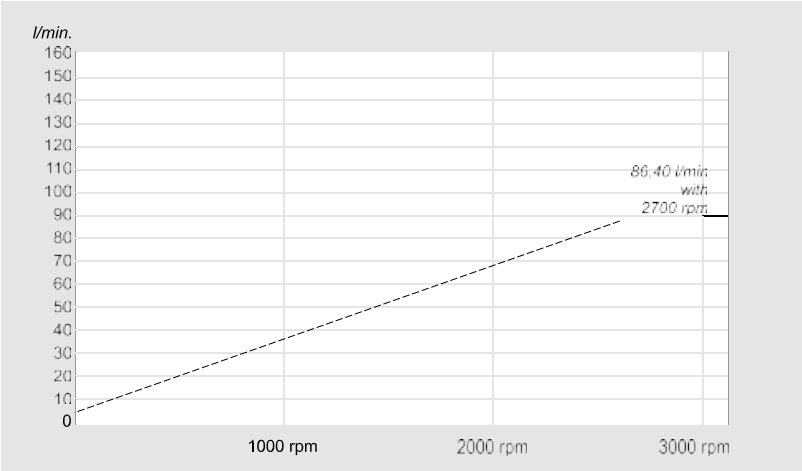


PRF-2 40 cc

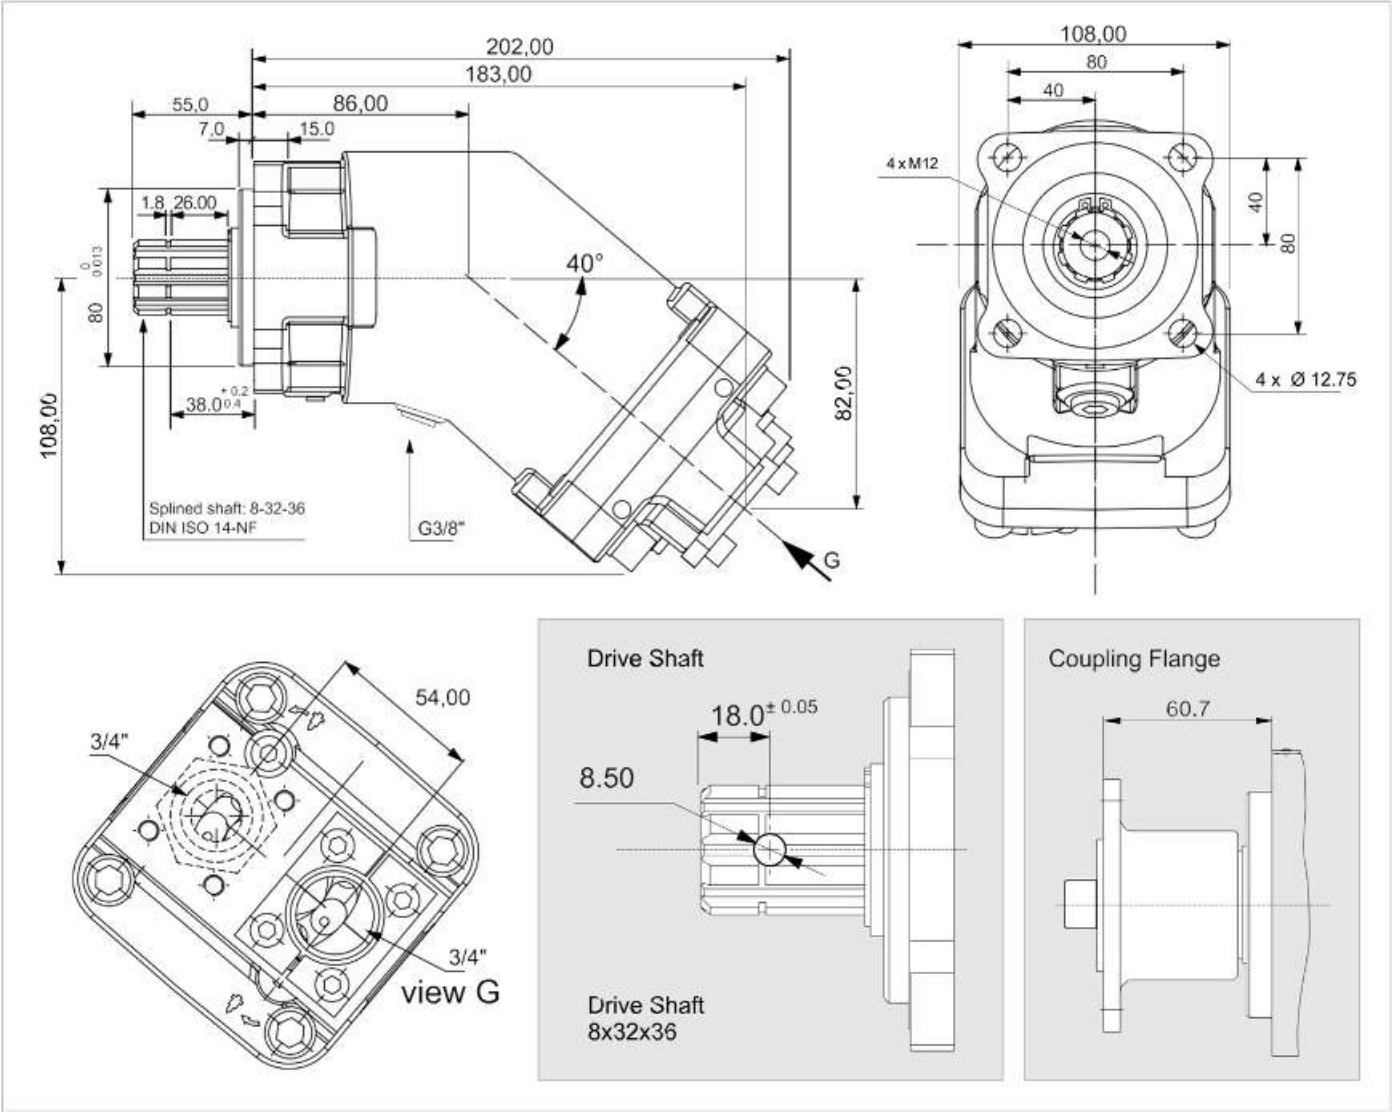


x 1000 rpm	40,20 cc
x 1500 rpm	60,30 cc
Max. Continuous Pump Speed	1900 rpm
Max. Limited Pump Speed	2500 rpm
Max. Continuous Pressure	350 bar
Max. Intermit. Peak Pressure	400 bar
Max. Torque at 350 bar	240 Nm
Weight without inlet fitting	10,50 kg
Weight with inlet fitting	10,90 kg
Torque without inlet fitting	11,12 N.m
Torque with inlet fitting	11,40 N.m
Rotation	CW-CCW
Fluid	Min.B.Hyd.Oil
Inlet & Outlet	3/4"

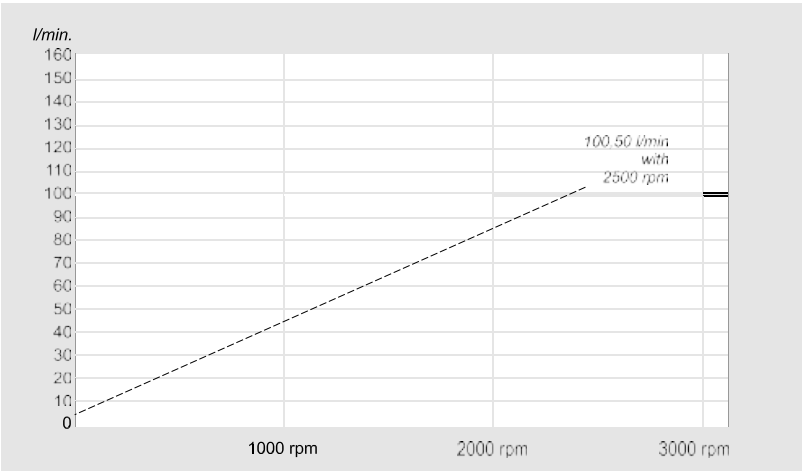


PRF-2 50 cc

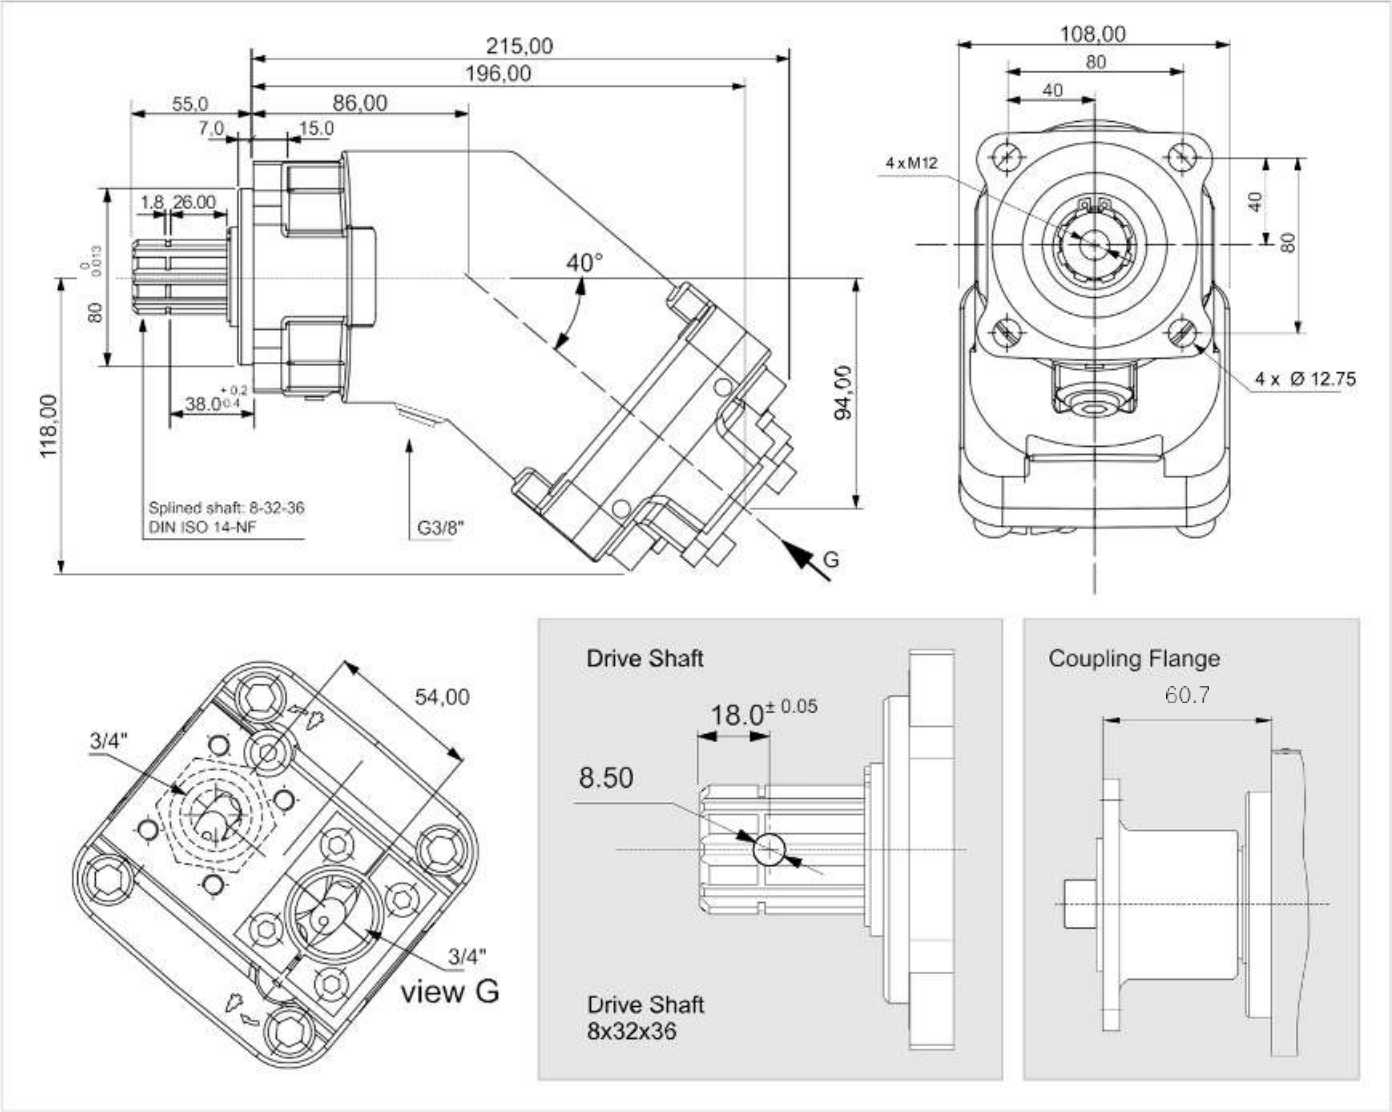


x 1000 rpm	50,00 cc
x 1500 rpm	75,00 cc
Max. Continuous Pump Speed	1900 rpm
Max. Limited Pump Speed	2500 rpm
Max. Continuous Pressure	350 bar
Max. Intermit. Peak Pressure	400 bar
Max. Torque at 350 bar	292 Nm
Weight without inlet fitting	11,00 kg
Weight with inlet fitting	11,40 kg
Torque without inlet fitting	11,72 N.m
Torque with inlet fitting	12,20 N.m
Rotation	CW-CCW
Fluid	Min.B.Hyd.Oil
Inlet & Outlet	3/4"

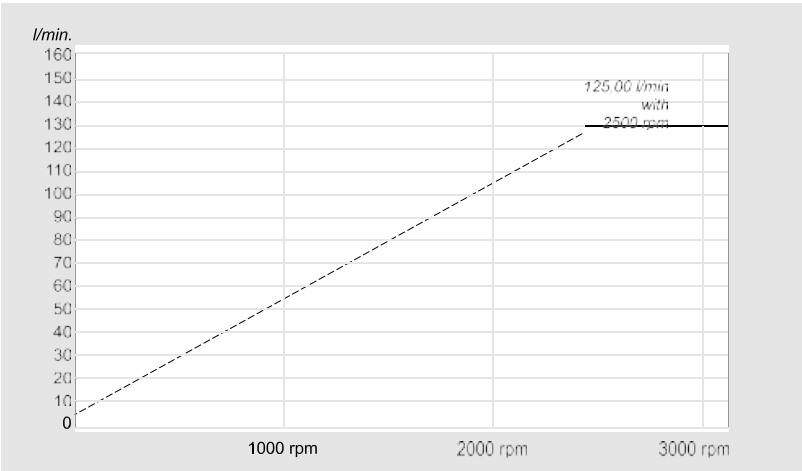


PRF-2 56 cc

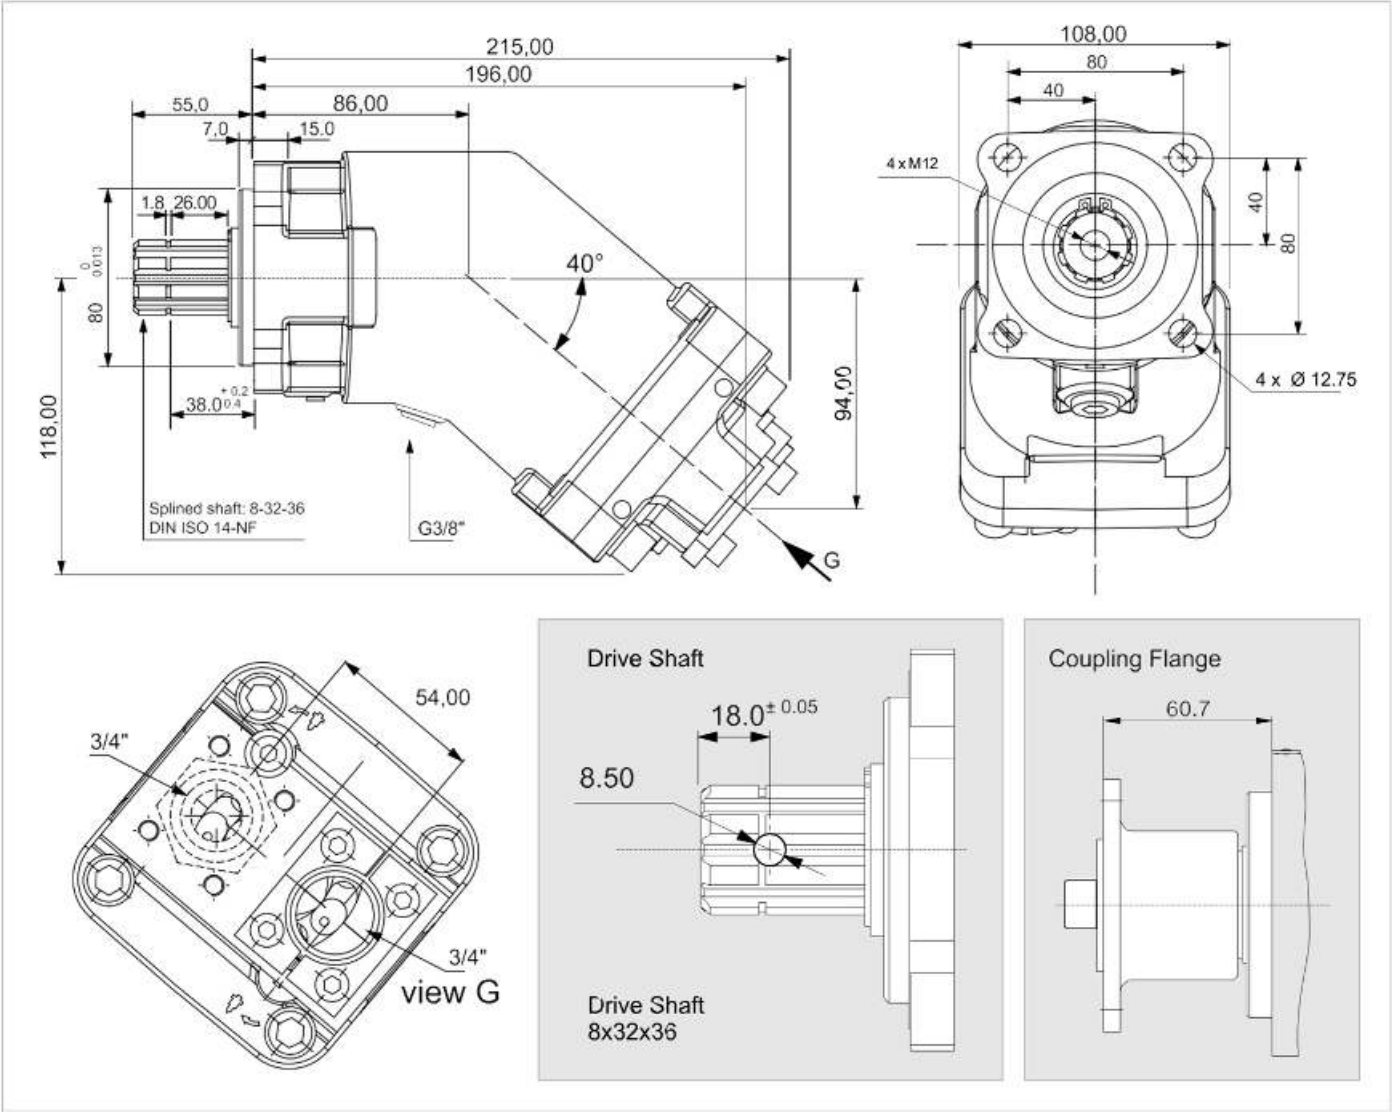


x 1000 rpm	56,40 cc
x 1500 rpm	84,60 cc
Max. Continuous Pump Speed	1900 rpm
Max. Limited Pump Speed	2300 rpm
Max. Continuous Pressure	350 bar
Max. Intermit. Peak Pressure	400 bar
Max. Torque at 350 bar	330 Nm
Weight without inlet fitting	11,50 kg
Weight with inlet fitting	11,90 kg
Torque without inlet fitting	11,79 N.m
Torque with inlet fitting	12,24 N.m
Rotation	CW-CCW
Fluid	Min.B. Hyd.Oil
Inlet & Outlet	3/4"

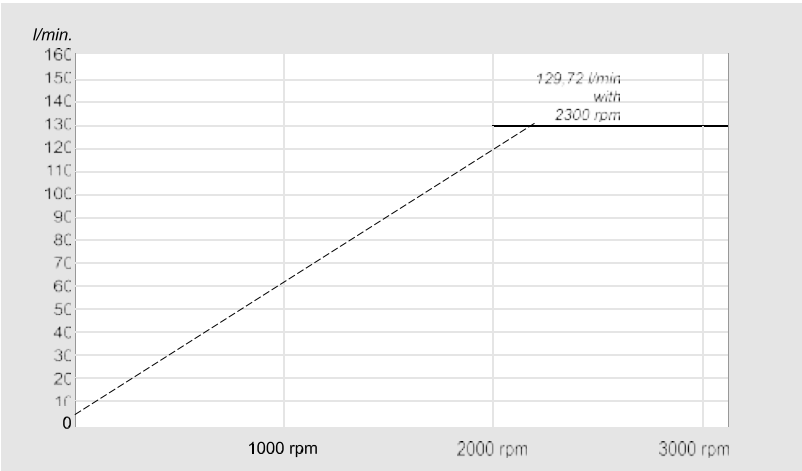


PRF-2 63 cc

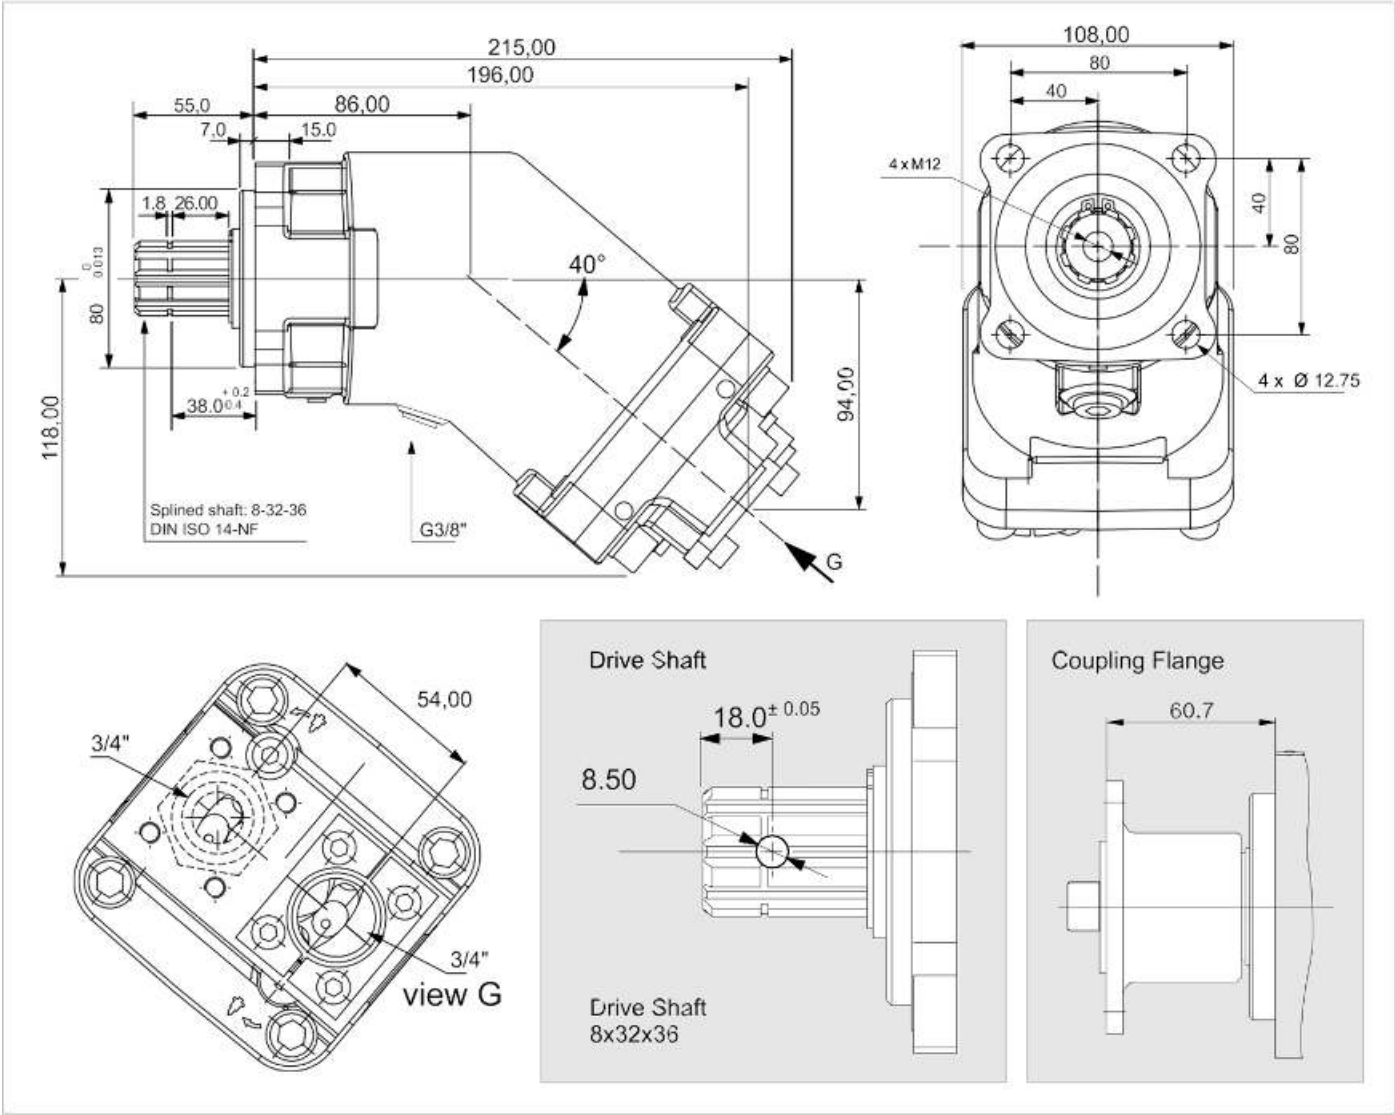


x 1000 rpm	63,00 cc
x 1500 rpm	94,50 cc
Max. Continuous Pump Speed	1900 rpm
Max. Limited Pump Speed	2300 rpm
Max. Continuous Pressure	350 bar
Max. Intermit. Peak Pressure	400 bar
Max. Torque at 350 bar	360 Nm
Weight without inlet fitting	11,50 kg
Weight with inlet fitting	11,90 kg
Torque without inlet fitting	11,82 N.m
Torque with inlet fitting	12,28 N.m
Rotation	CW-CCW
Fluid	Min. B. Hyd. Oil
Inlet & Outlet	3/4"

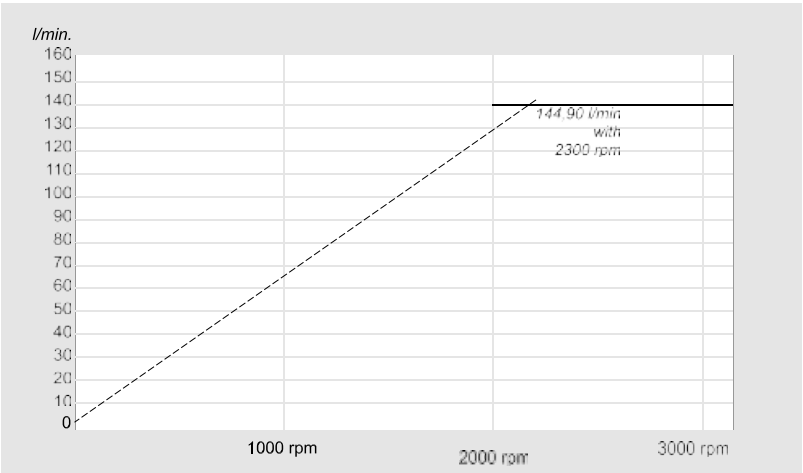


PRF-2 80 cc

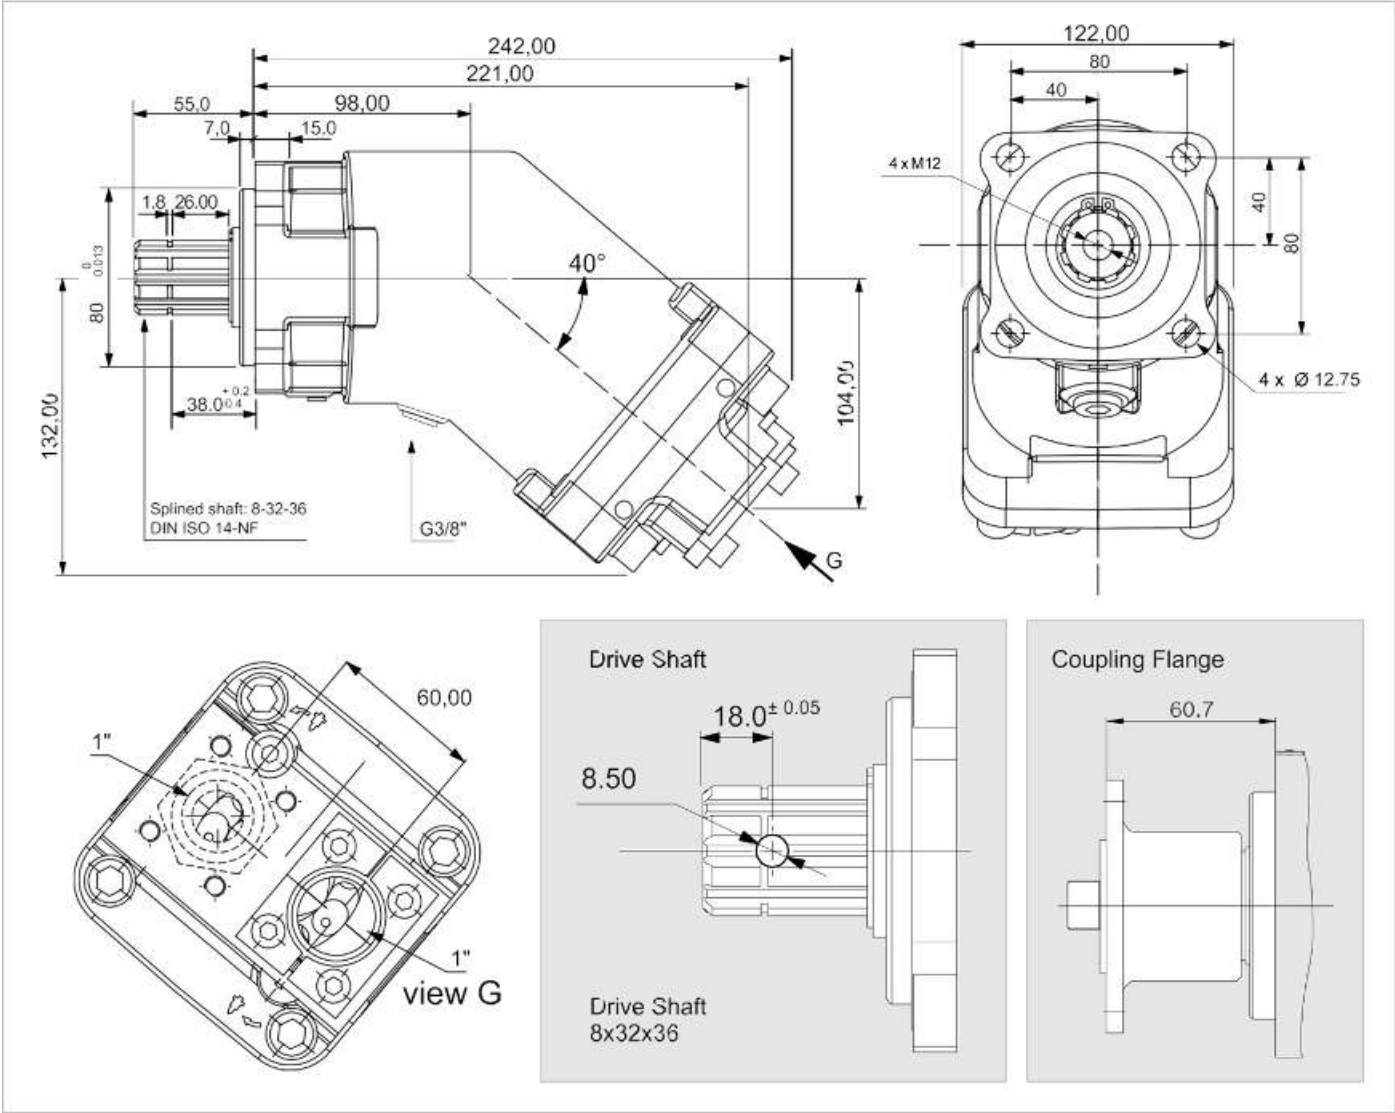


x 1000 rpm	80,00 cc
x 1500 rpm	120,00 cc
Max. Continuous Pump Speed	1700 rpm
Max. Limited Pump Speed	2100 rpm
Max. Continuous Pressure	350 bar
Max. Intermit. Peak Pressure	400 bar
Max. Torque at 350 bar	460 Nm
Weight without inlet fitting	15,00 kg
Weight with inlet fitting	15,40 kg
Torque without inlet fitting	17,80 N.m
Torque with inlet fitting	18,33 N.m
Rotation	CW-CCW
Fluid	Min. B. Hyd. Oil
Inlet & Outlet	1"

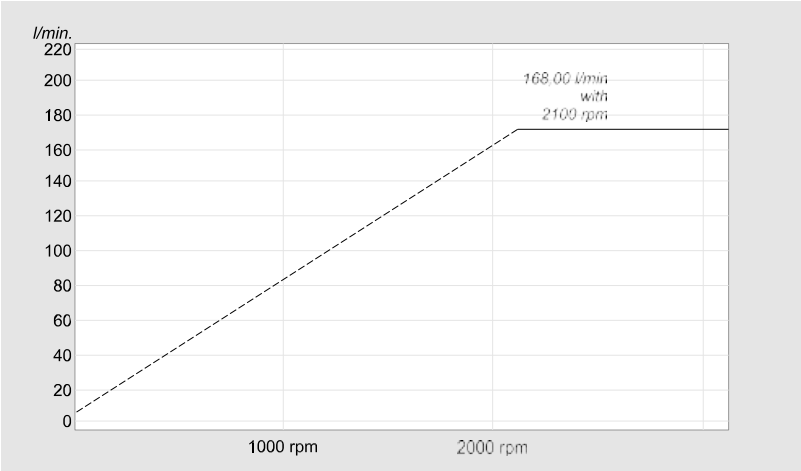


PRF-2 108 cc

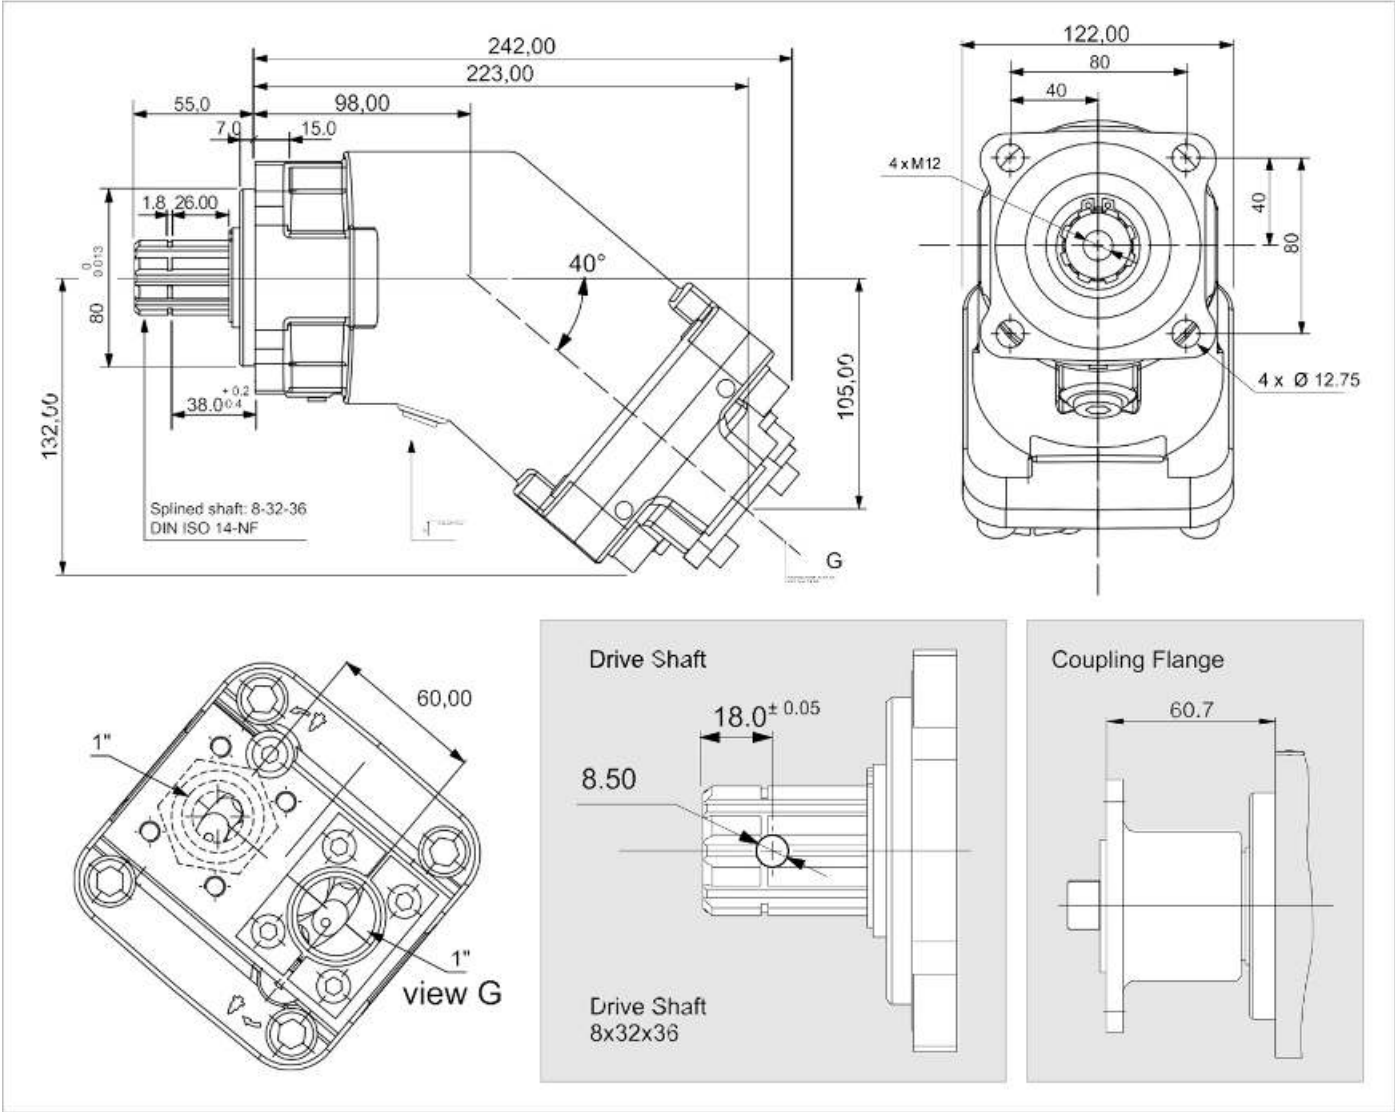


x 1000 rpm	108,40 cc
x 1500 rpm	162,60 cc
Max. Continuous Pump Speed	1700 rpm
Max. Limited Pump Speed	1900 rpm
Max. Continuous Pressure	350 bar
Max. Intermit. Peak Pressure	400 bar
Max. Torque at 350 bar	620 Nm
Weight without inlet fitting	15,50 kg
Weight with inlet fitting	15,90 kg
Torque without inlet fitting	17,92 N.m
Torque with inlet fitting	18,45 N.m
Rotation	CW-CCW
Fluid	Min. B. Hyd. Oil
Inlet & Outlet	1"

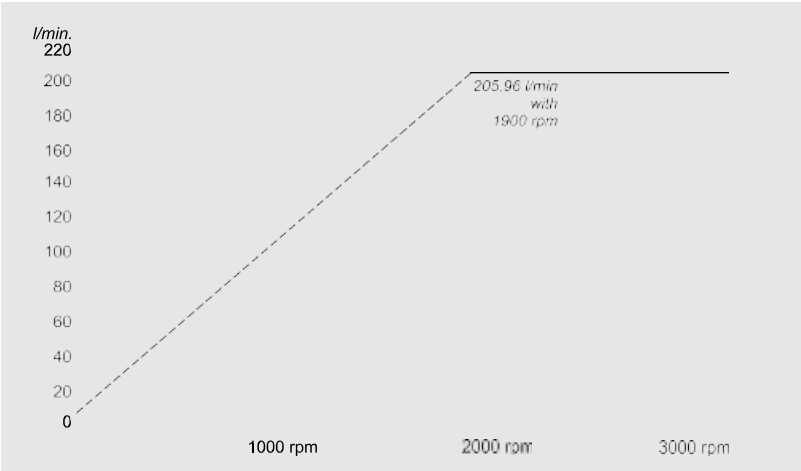

PRF-2 130 cc

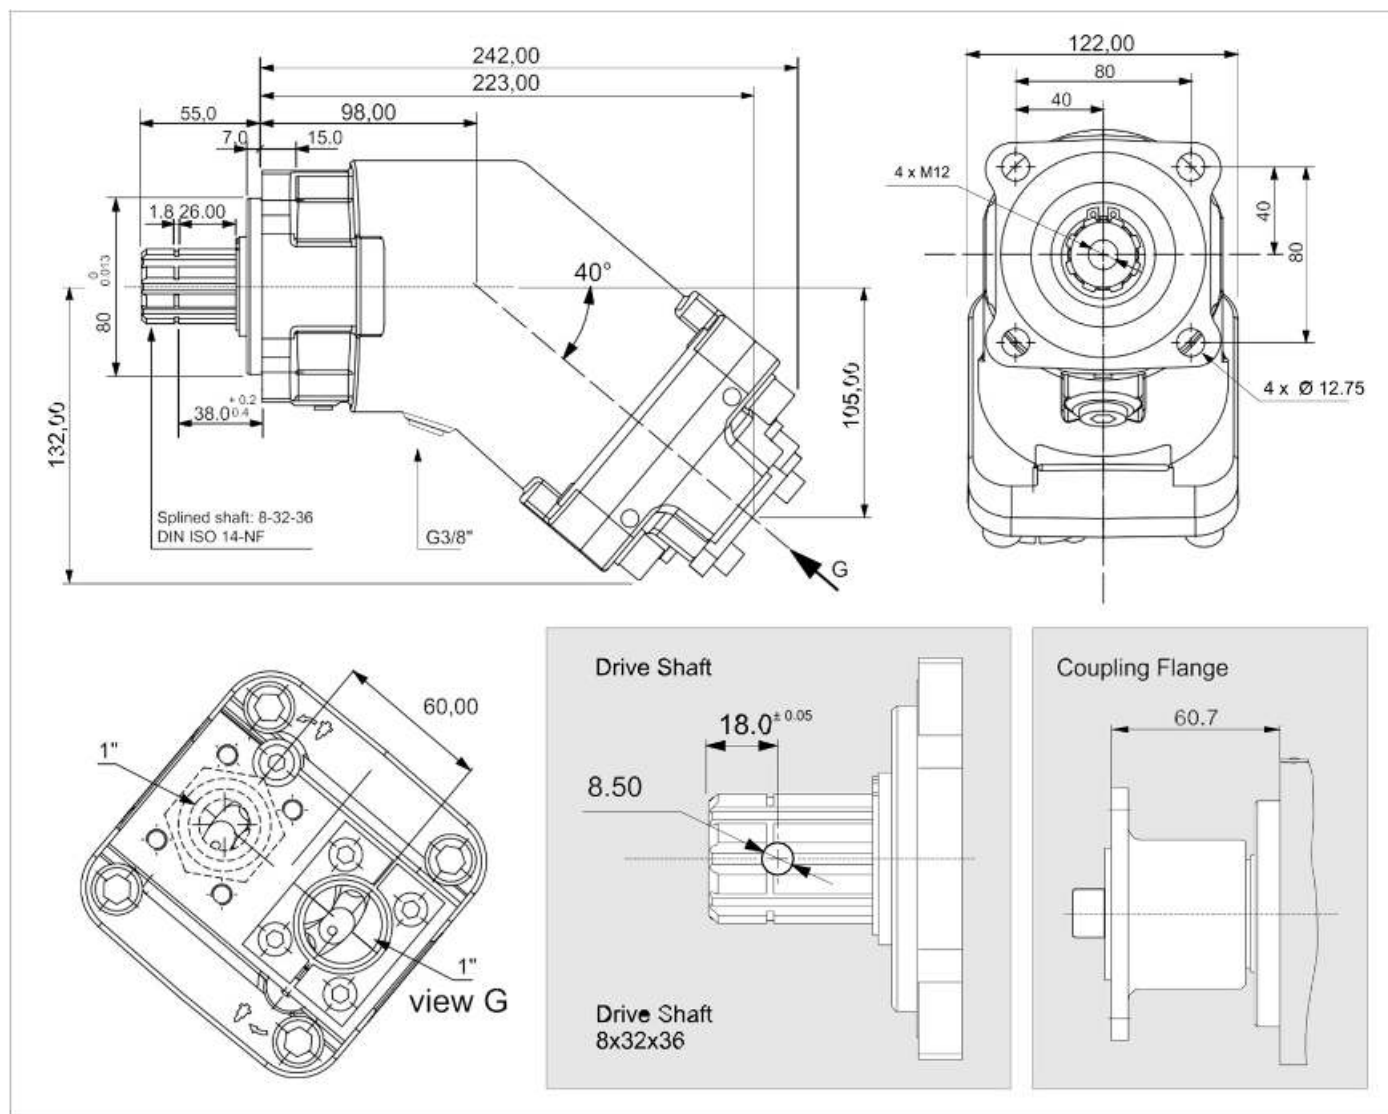

<i>x 1000 rpm</i>	130,40 cc
<i>x 1500 rpm</i>	195,60 cc
<i>Max. Continuous Pump Speed</i>	1700 rpm
<i>Max. Limited Pump Speed</i>	1900 rpm
<i>Max. Continuous Pressure</i>	350 bar
<i>Max. Intermit. Peak Pressure</i>	400 bar
	620 Nm
	15,50 kg
	15,90 kg

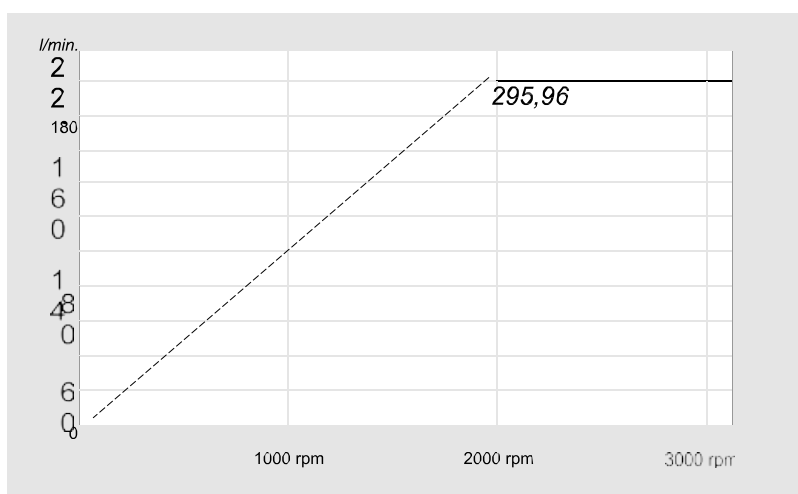

Hydraulic Piston Pumps

Axial Design Hydraulic Piston Pumps, High Pressure Piston Pumps

Dual Flow Piston Pumps, Tandem Output Piston Pumps, UNI Flange Piston Pumps



Address:

Expark Dış Ticaret Ltd. Şti.

FEVZİÇAKMAK MAH. AHMET PETEKÇİ CAD. NO: 26U, 42210, KARATAY/ KONYA

Tel: +90 537 949 99 31

Mail: info@expark.com.tr

Website: www.expark.com.tr